



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 10 March 2004

**THIS PAGE BLANK (USPTO)**



21MAR03 E784051-3 C68900  
P01/2700 0.00-0306487.0

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE  
B

21 MAR 2003

NEWPORT

The Patent Office

Cardiff Road  
Newport  
Gwent  
NP10 8QQ

1. Your reference

P-UK-PR109<sup>4</sup>

28/3/03

21 MAR 2003

2. Patent application number  
(The Patent Office will fill in this part)

0306487.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

BLACK & DECKER INC  
DRUMMOND PLAZA OFFICE PARK  
1423 KIRKWOOD HIGHWAY  
NEWARK, DELAWARE, USA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE, USA

341214004

4. Title of the invention

HAND HELD DRILLING AND/OR HAMMERNG TOOL WITH DUST COLLECTION UNIT

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

DARRIN M SHAYA; IAN S BELL;  
MARCUS A M CAVALIER  
BLACK & DECKER  
PATENT DEPARTMENT  
210 BATH ROAD  
SLOUGH  
SL1 3YD  
United Kingdom

Patents ADP number (if you know it)

7570971001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	11
Claim(s)	4
Abstract	1
Drawing(s)	4

1821

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application

Signature I S Bell

Date: 20 March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Maureen O'Reilly

01753 500676

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.


Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.




7/77

# Statement of inventorship and of right to grant of a patent

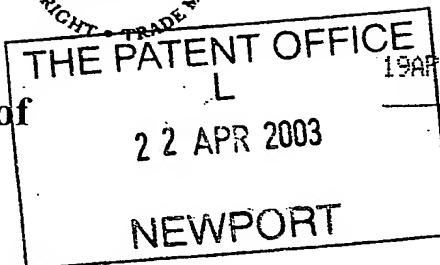

19APR03 B129789-2 C68900  
P07/7700 The Patent Office

Cardiff Road  
Newport  
Gwent  
NP10 8QQ

1.	Your reference	P-UK-PR1094
2.	Patent application number <i>(if you know it)</i>	0 306 487.0
3.	Full name of the or of each applicant	BLACK & DECKER INC
4.	Title of the invention  TOOL	
5.	State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By virtue of employment and in accordance with Section 39 of The Patents Act 1997
6.	How many, if any, additional Patents Forms 7/77 are attached to this form? <i>(see note (c))</i>	ONE
7.	I/We believe that the person(s) named over the page <i>(and on any extra copies of this form)</i> is/are the inventor(s) of the invention which the above patent application relates to.  Signature  Date: 17 April 2003	
8.	Name and daytime telephone number of person to contact in the United Kingdom	MAUREEN O'REILLY 01753 500676

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

KLAUS-DIETER ARICH  
AM ALTEN SPORTPLATZ 33  
65510 HUENSTETTEN-BEUERBACH  
GERMANY

8552602001

Patents ADP number (if you know it):

RALF BERNHART  
HEFTRICHER STRASSE 30  
65510 IDSTEIN  
GERMANY

8615452001

Patents ADP number (if you know it):

ERNST STAAS  
LIMBURGER STRASSE 10A  
65552 LIMBURG  
GERMANY

844847001

Patents ADP number (if you know it):

Reminder

Have you signed the form?

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

THOMAS STANKE  
BRESLAUER STRASSE 15  
65510 IDSTEIN  
GERMANY

8448466001

Patents ADP number (if you know it):

ROBERT WACHE  
AM KIRCHGARTEN 5  
65191 WIESBADEN  
GERMANY

3539749602

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder

Have you signed the form?

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**



## HAND HELD DRILLING AND/OR HAMMERING TOOL WITH DUST COLLECTION UNIT

The present invention relates to a hand held drilling and/or hammering tool with a dust collection unit and to a dust collection unit for such a tool.

Hand held drilling and/or hammering tools are known which can be used with a dust collection unit accessory. The collection unit, may be releasably mechanically mounted on the tool and will generally comprise a shroud for collecting dust from the region of a tool or bit of the tool, a dust collection chamber, a filter and a system for generating an airflow into and through the shroud, the chamber and the filter. Dust and debris generated by the tool or bit of the tool will be entrained in this airflow and so will be pulled into the shroud and into the chamber. As the air passes through the filter, any dust or debris entrained within it will be deposited in the chamber.

The system for generating the airflow will generally include a fan, which fan may be housed in the tool or in the dust collection unit. When the fan is housed in the tool, it is powered by the motor of the tool and it may have the dual function of also generating an airflow which cools components of the tool. An outlet from the dust collection unit will mate with an inlet to the fan of the tool in order to generate the airflow in the dust collection unit. When the fan is housed in the dust collection unit, it is known to power the fan by using the motor of the tool, for example by an end of the tool motor armature shaft engaging a shaft of the fan to rotatably drive the fan. A problem with these types of dust collection units is that the fan is driven at the speed of rotation of the motor of the tool and so an optimum motor speed for the tool and not for the fan is selected for the speed of rotation of the motor. In addition the speed of rotation of the motor may reduce, for example, when the tool is working hard. Therefore, the speed of the motor is not selected to be the optimum speed for the fan.

A separate motor can be used for powering the fan of the dust collection unit, which motor is mounted within a housing of the dust collection unit. This has the advantage that the characteristics of the motor can be specifically tailored to optimise

the airflow through the dust collection unit. However, some means is required for connecting the motor of the dust collection unit to a power supply.

5 The present invention aims to provide an efficient dust extraction unit which can be easily mounted on a drilling and/or hammering tool.

According to a first aspect of the present invention there is provided an electrically powered hand held drilling and/or hammering tool having a dust collection unit powered by a motor housed in the unit, which unit can be releasably fitted to the  
10 tool, comprising:

a plug arrangement and a cooperating socket arrangement, one of which is formed on the tool and the other of which is formed on the unit, for electrically connecting the power supply for the tool to the motor of the unit;  
a first mechanical fixing arrangement comprising a first projection and a first  
15 cooperating recess, one of which is formed on the tool and the other of which is formed on the unit, located adjacent the respective part of the plug and socket arrangements; and  
a second mechanical fixing arrangement, located remotely from the first and comprising a manually actuable releasable fixing arrangement, such as a  
20 latch arrangement, and a second cooperating recess, one of which is formed on the tool and the other of which is formed on the unit,

wherein the first and second mechanical fixing arrangements cooperate to secure the dust collection unit to the tool in such a way that the plug and socket arrangements form an electrical connection.

25

The present invention provides a dust collection unit having its own motor, which can be tailored to the fan so that an optimum level of airflow is generated so as to optimise the performance of the dust collection unit. In addition it provides a robust and ergonomic fixing arrangement for releasably securing the dust collection  
30 unit to the tool, which fixing arrangement facilitates the use of only a single manually operable actuator, for easy fixing and release of the unit with respect to the tool. The fixing arrangement by which the unit is fitted to the tool also ensures automatic electrical connection between the motor of the unit and the power supply to the tool.

For a robust fixing of the unit to the tool, the first recess may be positioned at an oblique angle to, and preferably substantially perpendicular, to the second recess. Similarly, the releasable fixing arrangement may comprises a latching peg which extends at an oblique angle to, and preferably substantially perpendicular, to the first projection.

The plug arrangement may comprises a plurality of electrical connection pins and so as to help prevent damage to the pins, the first projection may be positioned adjacent to the plug arrangement so as to extend alongside the pins. To this end, the plug arrangement and the first projection may be located adjacent each other on one of the tool or the dust collection unit. So as to be able to cooperate with their corresponding components, the socket arrangement and the first recess may be located adjacent each other on the other of the tool or the dust collection unit. In a particular embodiment according to the present invention, the plug arrangement may be located on the dust collection unit and the socket arrangement may be located on the tool.

Where the socket arrangement is adjacent to the first recess on one of the tool or the unit and the plug arrangement is adjacent to the first projection on the other of the tool or unit and the socket arrangement may additionally comprises a socket cover, for covering an entrance to the socket arrangement when the unit is not fitted to the tool, which socket cover is engageable by the first projection to open the entrance when the unit is fitted to the tool. In this way the socket arrangement is protected by the cover from the ingress of dust when the unit is not fitted to it, and is opened for connection to the plug arrangement during fitment to the tool. The socket cover may be slideable and an arm of the socket cover which extends into the first recess may be engaged by the first projection so as to slide the cover with respect to the entrance to open the entrance when the projection passes into the first recess.

The dust collection unit may include a fan powered by the motor of the unit so as to generate a dust collecting airflow. In this case, the dust collection unit may comprise a shroud for collecting dust from the region of a tool or bit of the tool, which shroud communicates with a filter housing, incorporating a filter, such that an airflow

generated by the fan passes into the shroud, into the filter housing and then into the fan.

5 The tool and unit according to the present invention may additionally include a guide projection and a corresponding guide bore, one of which is formed on the tool and the other of which is formed on the unit, located adjacent the respective part of the second mechanical fixing arrangement. This helps to secure the second mechanical fixing arrangement and to provide a robust mechanical connection between the tool and the unit. Again, the guide projection and guide bore preferably  
10 extend at an oblique angle, and preferably perpendicularly, to a latching peg of the releasable fixing arrangement.

According to a second aspect of the present invention there is provided a dust collection unit powered by a motor housed in the unit, which unit is suitable for fitting  
15 to an electrically powered hand held drilling and/or hammering tool, comprising:

one of a plug arrangement or a cooperating socket arrangement, the other of which is formed on such a tool, for electrically connecting a power supply for such a tool to the motor of the unit;  
a first mechanical fixing arrangement comprising one of a first projection or a  
20 first cooperating recess, the other of which is formed on such a tool, which first mechanical fixing arrangement is located adjacent the one of the plug and socket arrangement on the unit; and  
a second mechanical fixing arrangement, located remotely from the first and comprising one of a manually actuatable releasable fixing arrangement, such as  
25 a latch arrangement or a second cooperating recess, the other of which is formed on such a tool,

wherein the first mechanical fixing arrangement cooperates and the second mechanical fixing arrangement cooperates with respective cooperating arrangements on such a tool to secure the dust collection unit to such a tool in such a way that the  
30 plug or socket arrangement on the unit forms an electrical connection to such a tool.

The unit according to the second aspect of the present invention has the same advantages and preferred features as described above in relation to the first aspect of the present invention.

One form of drilling and/or hammering tool incorporating dust collection unit in accordance with the present invention will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 shows a perspective view of a rotary hammer to which a dust collection unit can be fitted in accordance with the present invention;

Figure 1A shows an enlarged longitudinal cross-sectional view of region A of Figure 1;

Figure 1B shows an enlarged longitudinal cross-sectional view of region B of Figure 1;

Figure 1C shows an enlarged underneath view of region B of Figure 1 from the direction of arrow C;

Figure 1D shows a cross-sectional view along line D-D of Figure 1;

Figure 2 shows a longitudinal cross-section of a dust collection unit for attachment to the rotary hammer of Figure 1, in accordance with the present invention;

Figure 3 shows a perspective view of the upper portion of region E of Figure 2 from the direction of arrow G;

Figure 4 shows a side view of the rotary hammer of Figure 1 with the dust collection accessory of Figure 2 fitted to it;

Figure 5 shows a partial longitudinal cross-section of region H of the dust collection unit of Figure 2; and

Figure 6 shows a circuit diagram of the wiring between the electricity supply to the hammer of Figure 1 and the motor of the dust extraction unit of Figure 2.

The hand held rotary hammer shown in Figures 1 and 4 has a housing comprising a motor housing portion (2) within which an electric motor (3) of the hammer is housed. A tool holder (26) is located at the forward end of a spindle of the hammer. A tool or bit (24) can be non-rotatably and releasably fitted within the tool holder so as to allow limited reciprocation of the tool or bit with respect to the tool holder. The hammer has a rear handle (18) in which an on/off trigger (20) is located for actuating a switch (23) for actuating power supply to the motor. The motor (3) of the hammer selectively drives a spindle drive mechanism for rotatingly driving the spindle of the hammer, thereby rotatingly driving the tool holder (26) and a tool or bit (24) mounted therein, as is well known in the art. Also, the motor of the hammer

selectively drives an air cushion hammering mechanism for repeatedly impacting the tool or bit (24), as is well known in the art. A mode change arrangement, actuated by a mode change knob (50), is provided for enabling the selective engagement of rotary drive to the spindle and/or selective actuation of the air cushion hammering mechanism so that the hammer can be operated in a drilling only mode, a hammering only mode and/or a combination rotary hammering mode, as is well known in the art. The rotary hammer is powered by a mains or generator supply of electricity, via a cable (19).

Figures 2 and 4 show a dust collection unit (40) for the hammer. The dust collection unit comprises a dust collection shroud (32) which, when the unit (40) is mounted on the hammer (as shown in Figure 4), surrounds the forward end of a tool or bit (24) mounted in the tool holder (26) of the hammer. The shroud (32) forms a chamber around the forward end of the tool or bit (24), the rearward wall of which is formed by a flexible brush (34) which fits around the tool or bit (24). The shroud (32) is mounted on a support arm (36) which is telescopically mounted within a receiving portion (38) of a main housing of the dust collection unit (40). The support arm (36) can be pushed into the receiving portion (38) against a biasing force from a spring arrangement (39) contained in the receiving portion (38). A channel extends along the support arm (36) with a first end of the channel communicating with the chamber of the shroud (32) and the second end of the channel communicating with an entrance (45) to a filter chamber (41) of the unit (40).

A filter arrangement, for example a filter (43) is housed within the filter chamber. The filter chamber has an inlet (45) which communicates with the channel in the support arm (36) and an outlet (47) which communicates with an inlet to a fan (49). The fan has an outlet (48). The fan is powered by a motor (51) housed in the rearward housing portion (53) of the dust collection unit (40).

When the dust collection unit of Figure 2 is mounted on the rotary hammer of Figure 1, as described below the resulting configuration is shown in Figure 4. The forward end of the tool or bit (24) is pressed against the surface to be worked and the shroud (32) is positioned so that a forward rim of the shroud is pressed against the surface to be worked. Then when the motor (3) of the hammer is actuated, by

depressing the trigger (20) of the hammer, the motor of the hammer is actuated and drilling and/or hammering commences, depending on the mode of operation of the hammer selected by the mode change knob (50). The depression of the trigger (20) also actuates the motor (51) of the dust extraction unit (40) fitted to the hammer, as described below.

The fan (49) generates an airflow which is pulled into the shroud (32), for example via one or more recesses in the forward face of a rim of the shroud (32), and from the shroud through the channel in the support arm (36) and into the inlet (45) to the filter housing (41). The dust generated by the working of the tool or bit is entrained in this airflow and thus transported into the filter housing. The dust is captured in the filter housing by the filter (43) and the air passes through the filter and into the inlet (47) of the fan (49). The air passes through the fan and is discharged out of the outlet (48) of the fan. As the tool or bit (24) moves into the surface being worked, the support arm (36) retracts against the biasing force of the spring arrangement (39) and maintains the forwardmost rim of the shroud against the surface being worked. When the trigger (20) of the hammer is released, the power to the hammer motor (3) and the fan motor (51) is disconnected.

When the dust collection unit (40) is fitted to the hammer, an electrical connection (29) (See Figure 6) is formed between the motor (51) of the dust collection unit and the electricity supply to the hammer via a three pinned plug element (12), shown in detail in Figure 3. The plug element (12) comprises a base (4) which is mounted in a recess at the rearward end of the dust collection unit's rearward housing portion (53). Three metal pins (6) extend through the base (4). At its rearward end, rearwardly of the base (4) and the pins the rearward housing portion (53) is formed with an upwardly extending projection (8). The projection (8) extends beyond the upper ends of the pins (6) in a direction substantially parallel to the longitudinal axes of the pins. The projection (8) has a substantially U-shaped cross-section in a plane perpendicular to the axes of the pins (6) and at its end remote from the base (4) the forward facing ends (10) of the projection are chamfered. Laterally of the pins (6) the rearward housing portion is formed with a pair of upwardly extending projections (14). The facing inner surfaces of the projections (14) are curved to match the curved surface of the edges of the underside

of a portion (B) of the hammer housing, to which the plug element (12) can be fitted. The projection (8) and pair of projections (14) cooperate to provide some protection against damage to the pins (6).

5           The region (B) of the hammer, which connects the lower end of the rear handle (18) with the motor housing (2) is formed on its underside with a socket arrangement (16). The socket arrangement is shown in longitudinal cross-section in Figure 1B and an underneath view of the socket arrangement is shown from the direction of the arrow (C) in Figure 1C.

10

          The socket arrangement (18) is formed with three sockets (28) for receiving the three pins (6) of the plug arrangement (12) in order to make the electrical connection (29) between the motor (51) of the dust collection unit (40) and the electrical power supply to the hammer, as shown in Figure 6. The entrance to each socket is formed  
15 by a slot (22) in the hammer housing.

          When the hammer is operated without the dust extraction unit fitted to it the socket (28) must be covered to prevent the ingress of dust. To achieve this a socket cover (30) is slideably mounted within the hammer housing to selectively cover the  
20 socket, as shown in Figures 1B, 1C and 1D. The socket cover is biased by a spring arrangement (31) into the position shown in Figures 1B to 1D in which the cover (30) covers the entrance slots (22) to the sockets (28). The socket cover (30) can be moved in the direction of the arrow (F) in Figure 1B against the biasing force of the spring arrangement so as to move the rearward end (30a) of the socket cover to the  
25 left of rearward most slot (22a) and to align the slots (30b) in the socket cover (30) with the remaining slots (22b) of the socket arrangement and thus open the entrances to the sockets (28). To the rear of the slots (22) the hammer housing is formed with a recess (54) for receiving the projection (8) of the plug arrangement (12) of the dust collection unit (40). Accordingly the recess (54) has a U-shaped cross-  
30 section in a plane parallel to the longitudinal fore-aft axis (56) of the hammer, as can be seen in Figure 1C and 1D. The socket cover is formed with a pair of arms (30b) which extend rearwardly, one to either side of a main central portion of the socket cover. When the socket cover (30) is in the position shown in Figures 1B and 1C, the arms (30b) extend out of a pair of corresponding holes in the hammer housing, so



that they extend into the opposite ends of the U-shaped recess (54), as shown in Figure 1C.

5 The region (A) of the housing of the hammer is formed with a downwardly facing positioning bore (58) and a forwardly facing recess (60), as shown in Figure 1A. The region (H) of the housing of the dust collection unit (40) shown in Figure 2, and in more detail in Figure 5, is formed with a corresponding cylindrical upwardly extending positioning projection (62) for cooperating with the positioning bore (58) in the region (A) of the hammer housing. The region (H) of the dust collection unit (40)  
10 is also provided with a latch arrangement, shown in Figure 5, for releasably engaging with the recess (60) in the region (A) of the hammer housing.

The region (H) of the dust collection unit (40) is formed with a chamber (64) within which is slideably located a latch peg (66) which is biased by a spring (68) so  
15 that a projecting end (66a) of the ledge extends out of a hole (70) at the rearward end of the chamber (64). The projecting end (66a) of the latch peg is engageable with the recess (60) in the region (A) of the hammer housing. The latch peg (66) and receiving recess (60) extend in a direction substantially perpendicular to the longitudinal axis (56) of the hammer. An actuator (72) is pivotally mounted in the  
20 chamber (64) via a pair of pivot pins (74) (only the upper one of which is shown in Figure 5) within a pair of recesses (76) formed in a pair of guide rails (78) (only the upper one of which is shown in Figure 5). The guide rails (78) are formed in the chamber (64) with one located above the actuator (72) and one located below the actuator. The pivoting actuator (72) is L-shaped and the pivot pins (74) are formed  
25 towards an end of one of the arms, which arm forms a button which extends outside of the chamber (64) through a hole (80). The other of the arms is formed as a finger (72a) which is engageable with a recess (82) formed in a facing side of the latch peg (66). Thus, when the button formed by the actuator (72) is pressed by a user of the dust collection unit (40), in a direction indicated by the arrow (G), the actuator pivots  
30 into the chamber (64) about the pivot pins (74) and the finger (72a) of the actuator moves rearwardly, thereby pulling the latch peg (66) rearwardly against the biasing force of the spring (68) due to the engagement of the finger (72a) in the recess (82) of the latch peg.

With the dust collection unit (40) detached from the hammer, the socket cover (30) is biased into a position in which it covers the entrance slots (22) to the socket arrangements (28). To connect the dust collection unit to the hammer, the projection (8) of the plug arrangement (12) of the dust collection unit is inserted into the corresponding recess (54) formed in the region (B) of the hammer housing rearward of the socket arrangements (28). The chamfered ends (10) of the projection (8) engage the arms (30b) of the socket cover (30), to slide the socket cover forwardly against the biasing force of the spring arrangement so as to open the entrances to the socket arrangements (28). Thus, the pins (6) of the plug arrangement (12) of the dust collection unit can move into the socket arrangements (28) in the region (B) of the hammer housing. The pins (6) are correctly aligned with the entrance slots (22) to the socket arrangements by the engagement of the projection (8) of the plug arrangement within the recess (54) of the socket arrangement. The pins (6) move into the socket arrangements and thereby form the electrical connection (29) between the motor (51) of the dust collection unit (40) with the electrical supply to the hammer, as shown in Figure 6. As the plug arrangement (12) is moved into the socket arrangements (28) and recess (54) the projections (14) to either side of the pins (6) of the plug arrangement move into engagement around the sides of the region (B) of the hammer housing so as to provide some lateral guidance of the dust collection unit (40) on the hammer housing.

With the plug arrangement (12) inserted in the socket arrangements (28), the forward end of the dust collection unit (40) can be moved upwardly towards engagement with the hammer housing until the positioning projection (62) on region (H) of the dust collection unit engages in the corresponding positioning recess (58) in region (A) of the hammer housing. In this movement the rearward end (66a) of the latching peg is pushed into the chamber (64) in the region (H) of the dust collection unit, against the biasing force of the spring (68) by the portion (84) of the hammer housing between the bore (58) and recess (60). Then as soon as the rearward end (66a) of the latch peg comes into alignment with the recess (60) in region (A) of the hammer housing the spring (68) biases the rearward end (66a) of the latch peg (66) into engagement with the recess (60), to thereby secure the dust collection unit to the hammer.

Accordingly, there are two mechanical fixing points between the hammer and the dust collection unit, the first is in region (B, E) of the hammer and unit and comprises the engagement of the projection (8) in the recess (54) and the second is in region (A, H) of the hammer and unit and comprises the releasable latch (66) and recess (60). This mechanical engagement ensures the automatic electrical connection between the dust collection unit and the hammer.

The dust collection unit is released from the hammer housing by a user depressing the button formed by the actuator (72) of the latch arrangement. This causes the rearward end (66a) of the latch peg to retract from the recess (60) in the hammer housing. Then the dust collection unit can be moved downwardly to disengage the positioning projection (62) from the position bore (58) and the pins (6) and projection (8) of the plug arrangement (12) from the recess (54) and socket arrangements (28). As the plug arrangement (12) is withdrawn from the socket arrangements (28) and recess (54), the projection (8) ceases to engage the arms (30b) of the socket cover and the socket cover (30) is moved under the biasing force of the spring arrangement in the direction opposite to the arrow (F) into the position shown in Figures 1B and 1C and so once more covers the entrance slots (22) to the socket arrangements (28).

## CLAIMS

1. An electrically powered hand held drilling and/or hammering tool having a dust collection unit powered by a motor (51) housed in the unit, which unit can be releasably fitted to the tool, comprising;
  - a plug arrangement (12) and a cooperating socket arrangement (28), one of which is formed on the tool and the other of which is formed on the unit, for electrically connecting the power supply for the tool to the motor (51) of the unit;
  - a first mechanical fixing arrangement comprising a first projection (8) and a first cooperating recess (54), one of which is formed on the tool and the other of which is formed on the unit, located adjacent the respective part of the plug and socket arrangements; and
  - a second mechanical fixing arrangement, located remotely from the first and comprising a manually actuatable releasable fixing arrangement (72,66) and a second cooperating recess (60), one of which is formed on the tool and the other of which is formed on the unit,
 wherein the first and second mechanical fixing arrangements cooperate to secure the dust collection unit to the tool in such a way that the plug and socket arrangements form an electrical connection.
2. A tool according to claim 1 wherein, the first recess (54) extends at an oblique angle to, and preferably substantially perpendicular, to the second recess (60).
3. A tool according to claim 1 or claim 2 wherein the releasable fixing arrangement comprises a latching peg (66) which extends at an oblique angle to, and preferably substantially perpendicular, to the first projection (8).
4. A tool according to any one of the preceding claims wherein the plug arrangement (12) comprises a plurality of electrical connection pins (6) and the first projection (8) is adjacent to the plug arrangement (12) and extends alongside the pins.

5. A tool according to any one of the preceding claims wherein the plug arrangement (12) and the first projection (8) are located adjacent each other on one of the tool or the dust collection unit.
- 5 6. A tool according to any one of the preceding claims wherein the socket arrangement (28) and the first recess (54) are located adjacent each other on one of the tool or the dust collection unit.
- 10 7. A tool according to any one of the preceding claims wherein the plug arrangement (12) is located on the dust collection unit and the socket arrangement (28) is located on the tool.
- 15 8. A tool according to any one of the preceding claims wherein the socket arrangement (28) is adjacent to the first recess (54) on one of the tool or the unit and the plug arrangement is adjacent to the first projection (8) on the other of the tool or unit and the socket arrangement additionally comprises a socket cover (30), for covering an entrance (22) to the sockets arrangement when the unit is not fitted to the tool, which socket cover is engageable by the first projection (8) to open the entrance (22) when the unit is fitted to the tool.
- 20 9. A tool according to claim 8 wherein the socket cover is slideable and an arm (30b) of the socket cover extends into the first recess (54) and is engaged by the projection (8) to open the entrances (22) when the projection (8) passes into the first recess (54).
- 25 10. A tool according to any one of the preceding claims wherein the dust collection unit (40) includes a fan (49) powered by the motor (51) of the unit so as to generate a dust collecting airflow.
- 30 11. A tool according to claim 10 wherein the dust collection unit comprises a shroud (32) for collecting dust from the region of a tool or bit (32) of the tool, which shroud communicates with a filter housing, incorporating a filter, such that an airflow generated by the fan passes into the shroud, into the filter housing and then into the fan.

12. A tool according to any one of the preceding claims additionally including a guide projection (62) and a corresponding guide bore (58), one of which is formed on the tool and the other of which is formed on the unit, located adjacent the respective part of the second mechanical fixing arrangement (72, 66).

5

13. A tool according to claim 12 wherein the guide projection (62) and guide bore (58) extend at an oblique angle, and preferably perpendicularly, to a latching peg of the releasable fixing arrangement (72, 66).

10

14. A tool according to any one of the preceding claims wherein the releasable fixing arrangement is a releasable latch arrangement (72, 66).

15

15. An electrically powered hand held drilling and/or hammering tool having a dust collection unit substantially as hereinbefore described with reference to any one of the accompanying drawings.

16. A dust collection unit powered by a motor (51) housed in the unit, which unit is suitable for fitting to an electrically powered hand held drilling and/or hammering tool, comprising:

20

one of a plug arrangement (12) or a cooperating socket arrangement (28), the other of which is formed on such a tool, for electrically connecting a power supply for such a tool to the motor (51) of the unit;

25

a first mechanical fixing arrangement comprising one of a first projection (8) or a first cooperating recess (54), the other of which is formed on such a tool, which first mechanical fixing arrangement is located adjacent the one of the plug and socket arrangement on the unit; and

a second mechanical fixing arrangement, located remotely from the first and comprising one of a manually actuatable releasable fixing arrangement (72, 66) or a second cooperating recess (60), the other of which is formed on such a tool,

30

wherein the first mechanical fixing arrangement cooperates and the second mechanical fixing arrangement cooperates with respective cooperating arrangements on such a tool to secure the dust collection unit to such a tool in such a way that the plug or socket arrangement on the unit forms an electrical connection to such a tool.





17. A unit according to claim 16 wherein, the first mechanical fixing extends in a direction at an oblique angle to, and preferably substantially perpendicular, to the direction in which the second mechanical fixing extends.
- 5 18. A unit according to any one of the claims 16 or 17 wherein the plug arrangement (12) is located on the unit and comprises a plurality of electrical connection pins (6) and the first projection (8) is located on the unit adjacent to the plug arrangement (12) and extends alongside the pins.
- 10 19. A unit according to any one of claims 16 to 18 wherein the plug arrangement (12) and the first projection (8) are located adjacent each other on the dust collection unit.
- 15 20. A unit according to any one of claims 16 to 19 which includes a fan (49) powered by the motor (51) of the unit so as to generate a dust collecting airflow.
- 20 21. A unit according to claim 20 which includes a shroud (32) for collecting dust from the region of a tool or bit (32) of the tool, which shroud communicates with a filter housing, incorporating a filter, such that an airflow generated by the fan passes into the shroud, into the filter housing and then into the fan.
22. A dust collection unit which is suitable for fitting to an electrically powered hand held drilling and/or hammering tool substantially as hereinbefore described with reference to any one of the accompanying drawings.

**ABSTRACT****HAND HELD DRILLING AND/OR HAMMERING TOOL  
WITH DUST COLLECTION UNIT**

An electrically powered hand held drilling and/or hammering tool having a dust collection unit powered by a motor (51) housed in the unit, which unit can be releasably fitted to the tool. A plug arrangement (12) and a cooperating socket arrangement (28), one of which is formed on the tool and the other of which is formed  
5 on the unit, are provided for electrically connecting the power supply for the tool to the motor (51) of the unit. A first mechanical fixing arrangement is provided comprising a first projection (8) and a first cooperating recess (54), one of which is formed on the tool and the other of which is formed on the unit, located adjacent the respective part of the plug and socket arrangements and a second mechanical fixing  
10 arrangement is provided, located remotely from the first and comprising a manually actuatable releasable latch arrangement (72,66) and a second cooperating recess (60), one of which is formed on the tool and the other of which is formed on the unit. The first and second mechanical fixing arrangements cooperate to secure the dust collection unit to the tool in such a way that the plug and socket arrangements form  
15 an electrical connection.

Figure 2.



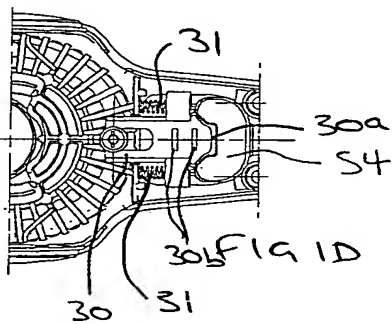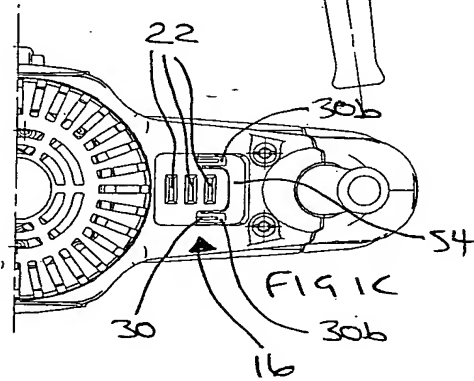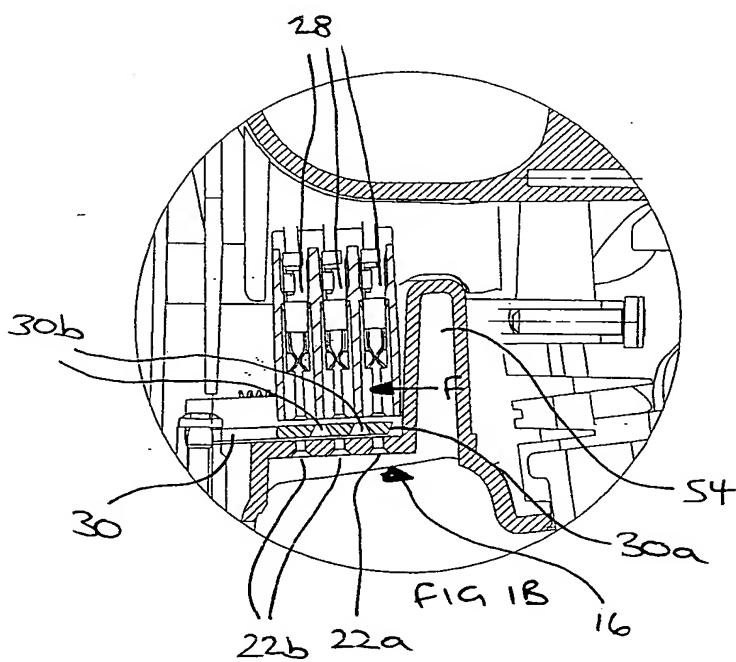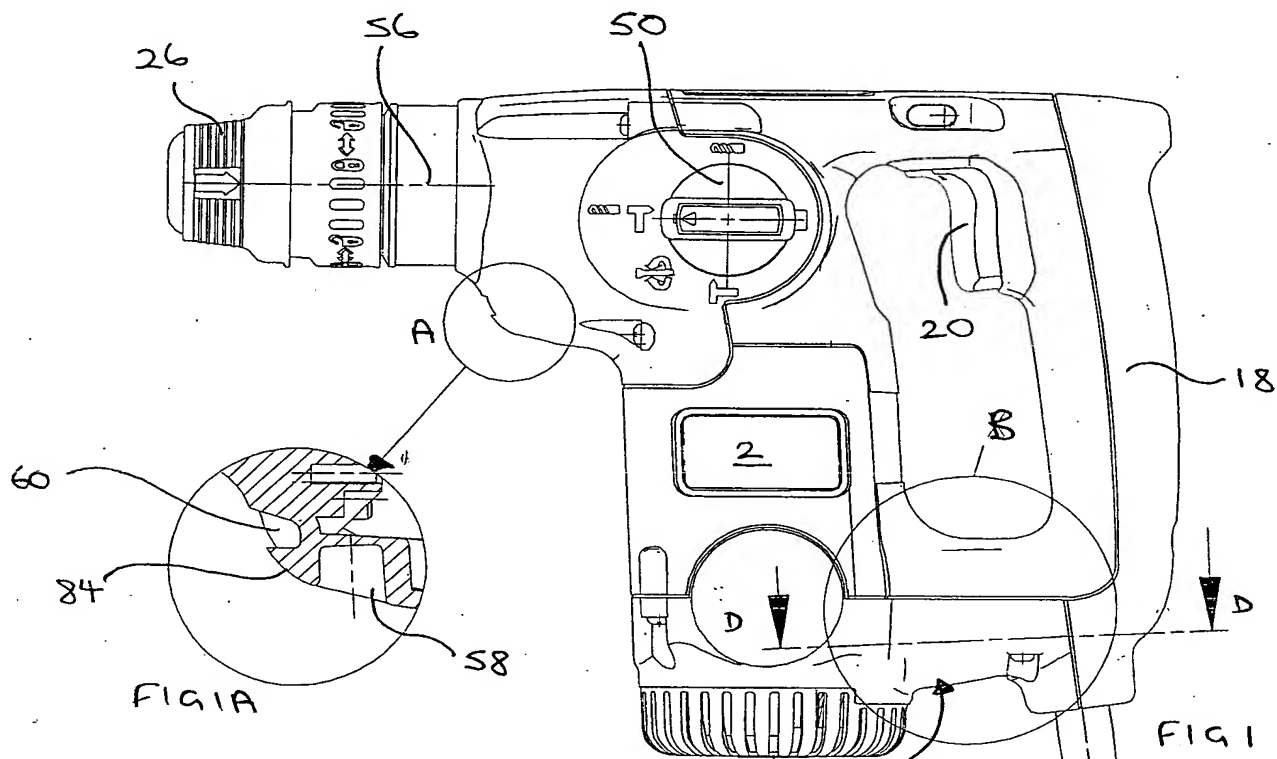

**THIS PAGE BLANK (USPTO)**

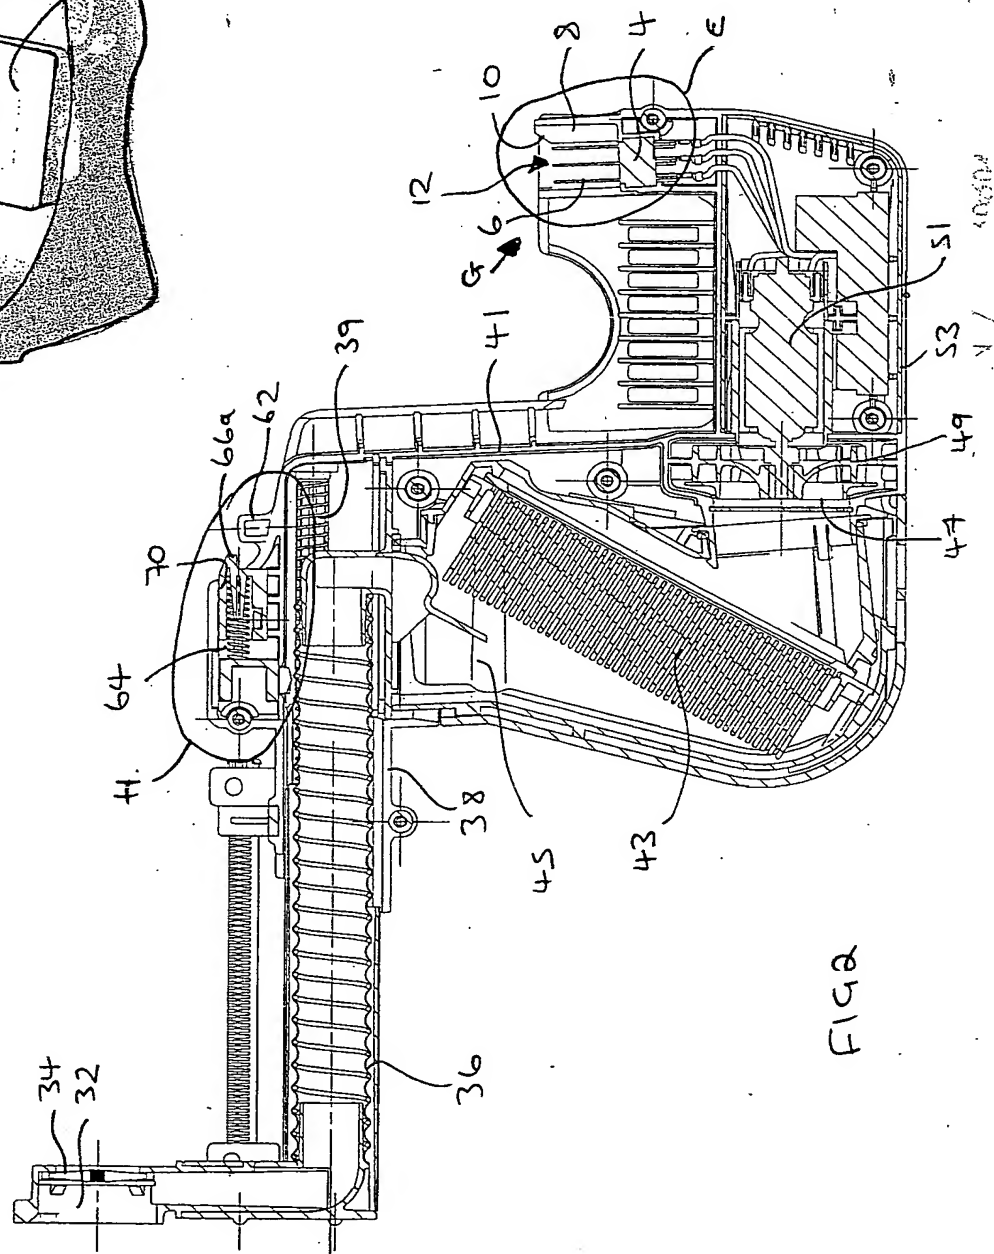


FIG. 2


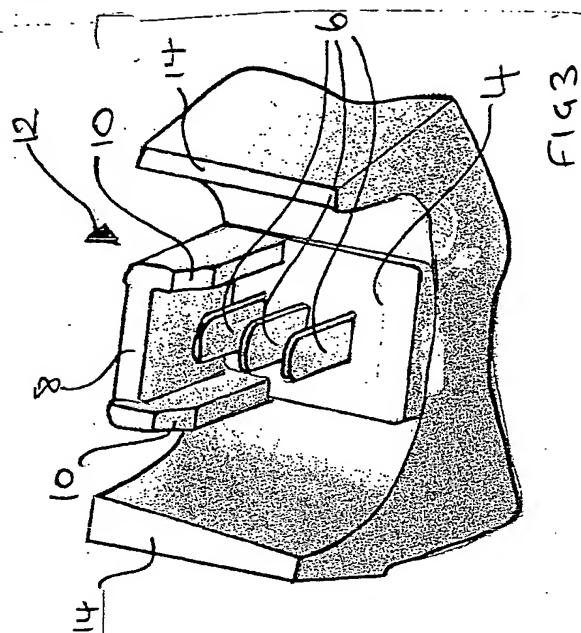


FIG. 3

**THIS PAGE BLANK (USPTO,**

314

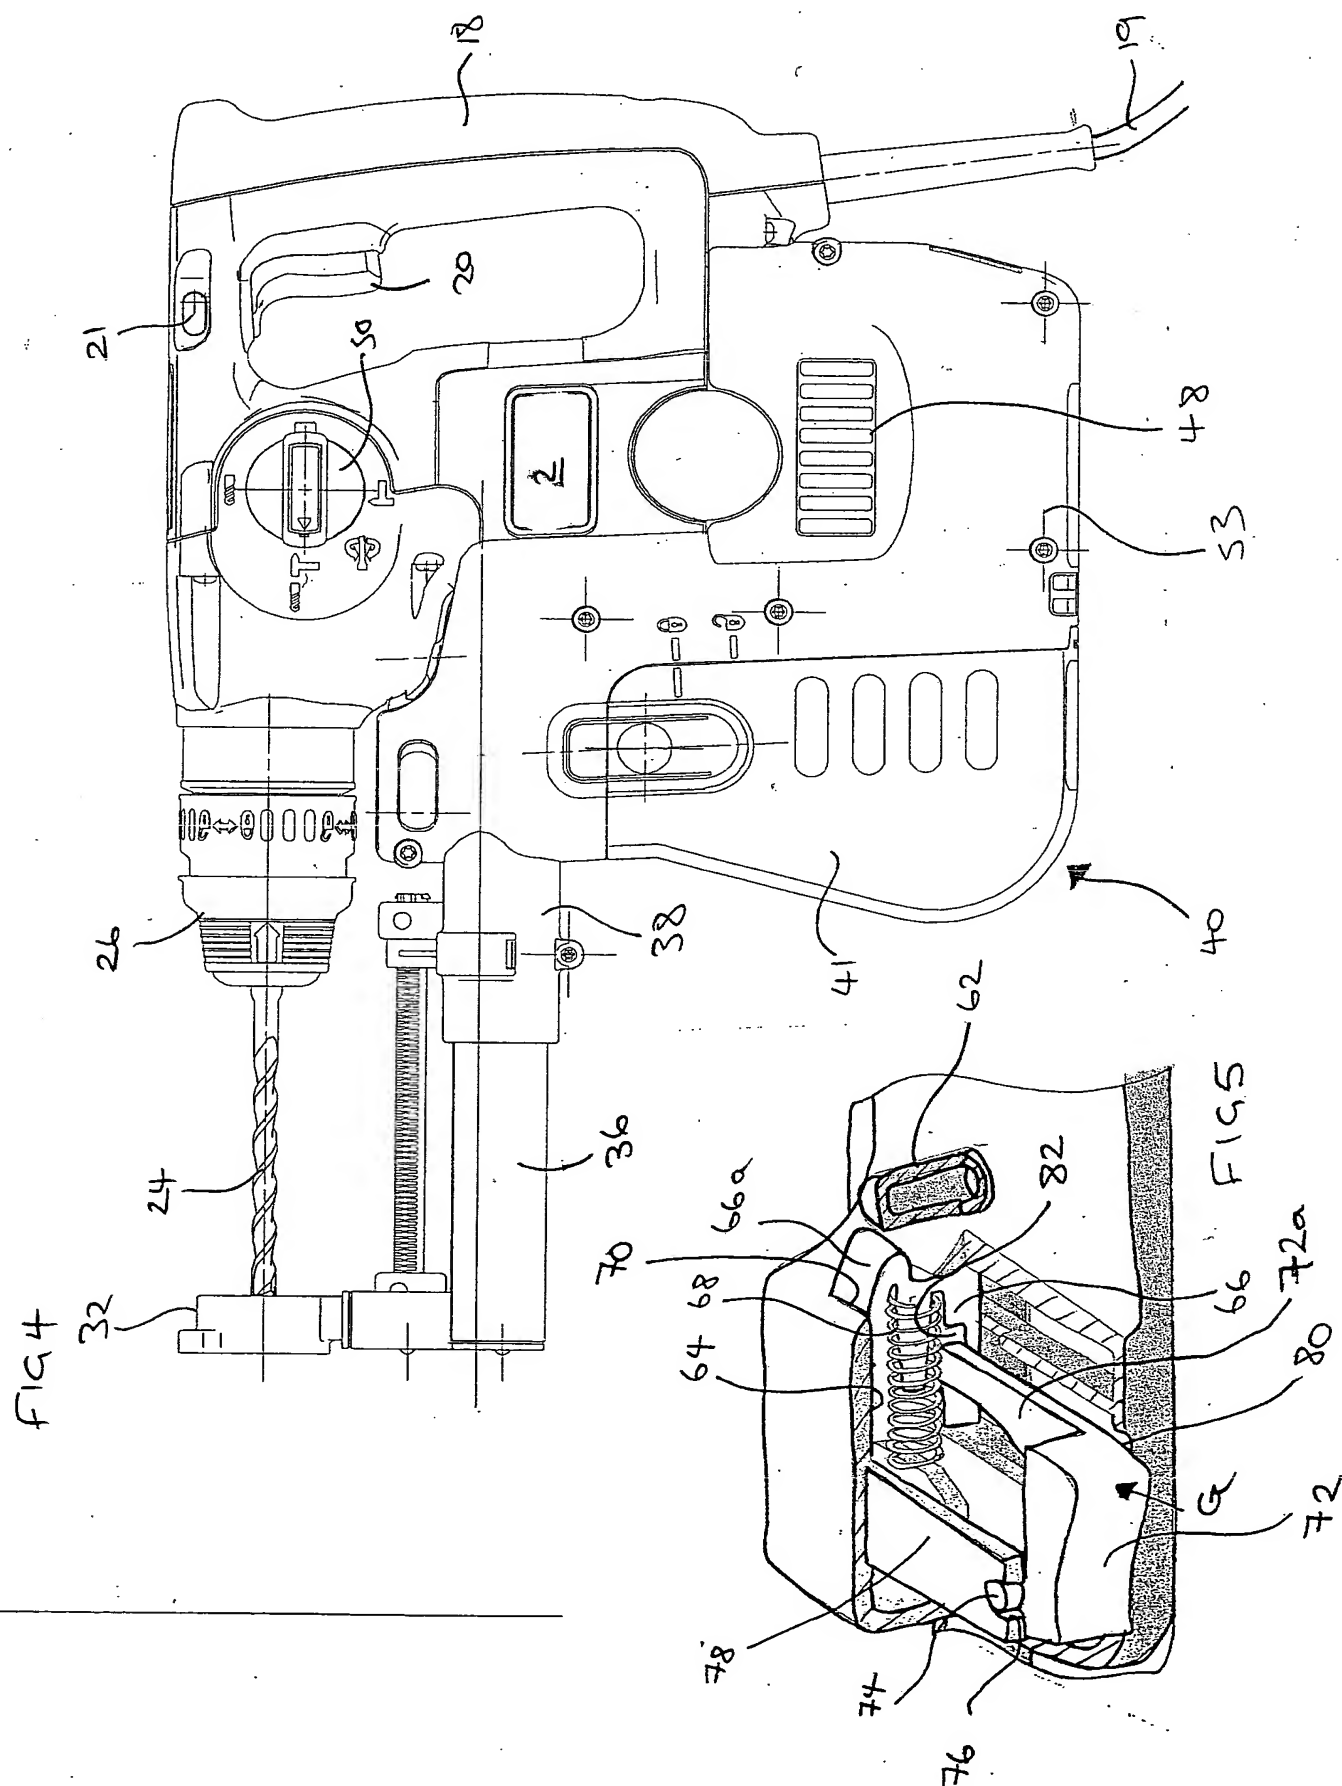

**THIS PAGE BLANK (USPTO)**

414  
T

# L-SHAPE D25305K: ROTARY HAMMER WIRING ASSEMBLY

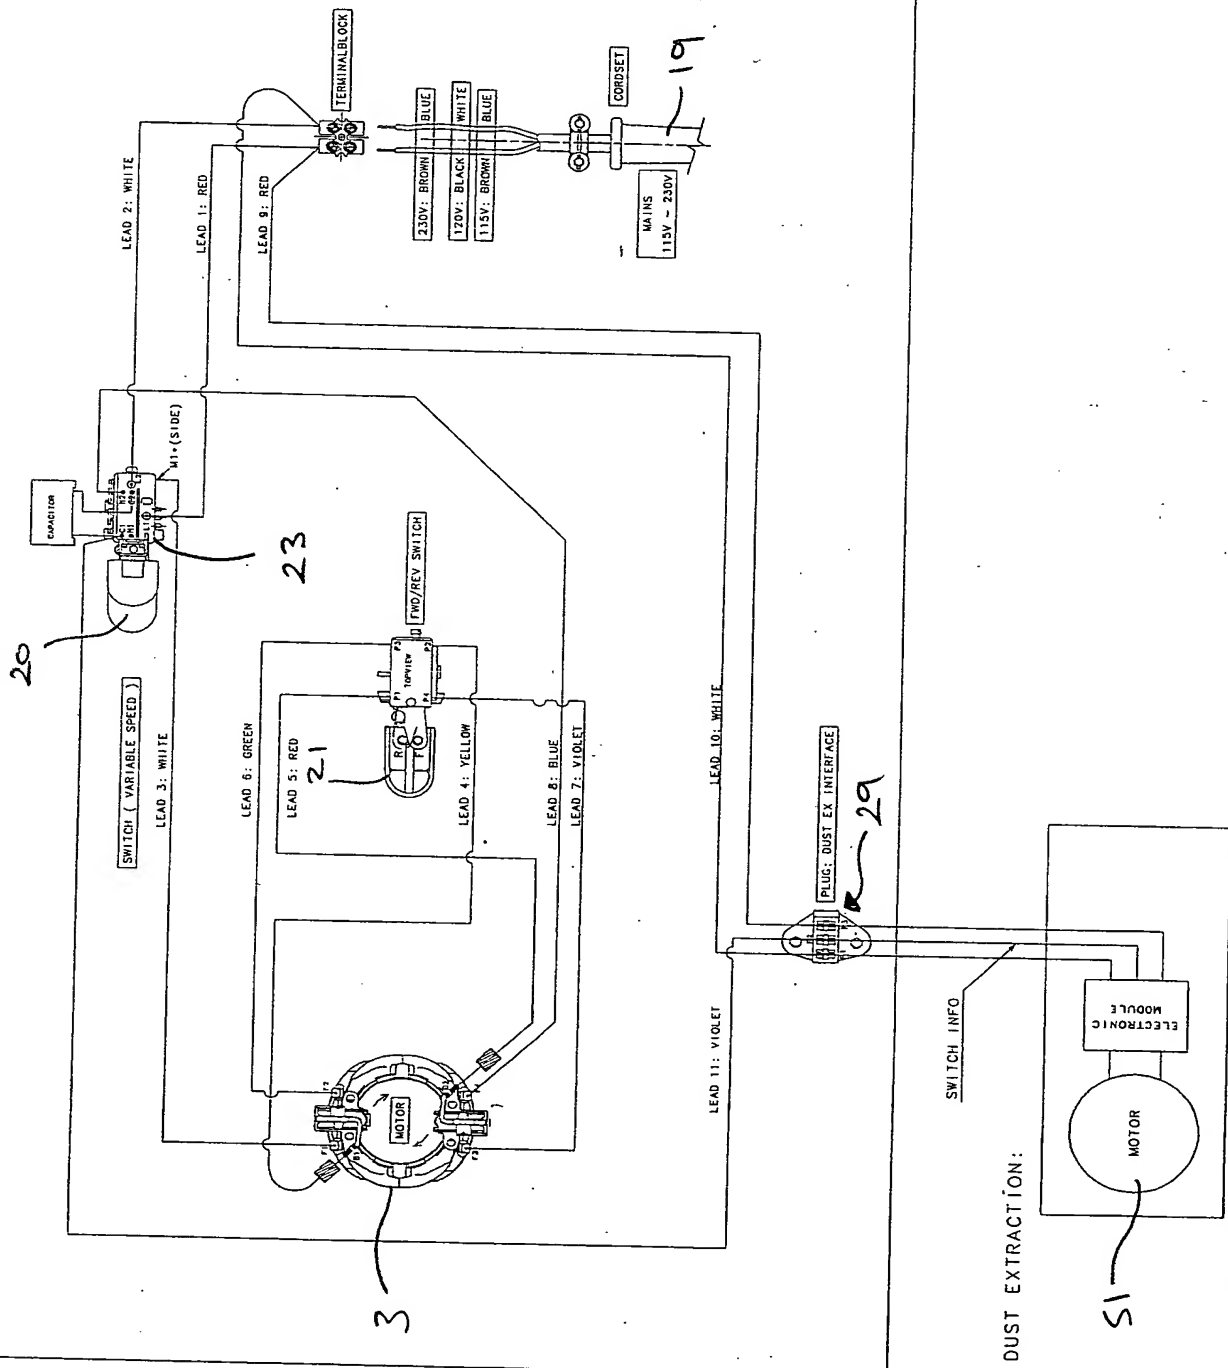


Fig 6.

**THIS PAGE BLANK (USPTO)**